## **THERMOPAR**

## **RTD FITTING**


1

2

3

4

5

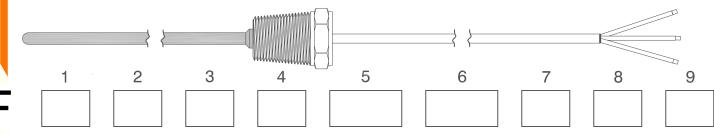

## RTF

RTD ELEMENT	
С	100 OHM
F	500 OHM
М	1000 OHM

NUMBER OF LEADS		
2	2 WIRES	
3	3 WIRES	
4	4 WIRES	

	DIAMETER
.125	1/8"
.188	3/16"
.250	1/4"

JUNCTION	
S	STANDARD
Е	EXPOSED

SHEATH LENGTH	
	EX: 3 3/8"

6	WIRE LENGTH	
	EX: 24"	

7	WIRE TYPE	
	F	FIBERGLASS
	s	FIBERGLASS W/ SSOB
	Α	FIBERGLASS W/ ARMOR
	Т	TEFLON

8	TERMINATION		
	Α	SPLIT LEADS	
	В	SPLIT LEADS W/SPADES	
	С	STANDARD MALE CONN.	
	D	MINI MALE CONN.	
	E	STANDARD FEMALE CONN.	
	F	MINI FEMALE CONN.	

FITTINGS	
18	1/8" NPT
25	1/4" NPT
50	1/2" NPT

9